





160*80 split core CT

一、datasheet:

- 1、rated V: 0.66KV;
- 2、insulation V: 2KV;
- 3、rated H: 50HZ or 60HZ;
- 4、environment temperature: -15℃~+40℃;
- 5、Flame retardant properties: UL94-V0;
- 6、certification: CE、ETL

二、size: unit: mm

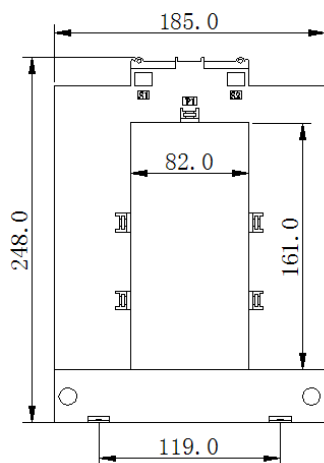

三、model:

1、output: 5A

model	Rated input (A)	Class	burden (VA)	Frequency	Isolation
XH-160*80	1000/5	0.5	10	50/60Hz	≤3KV
	1500/5	0.5	15		
	2000/5	0.2	15		
	2500/5	0.2	15		
	3000/5	0.2	20		
	4000/5	0.2	20		
	5000/5	0.2	20		

2、output: 1A

model	Rated input (A)	Class	burden (VA)	Frequency	Isolation
XH-160*80	1000/1	0.5	10	50/60Hz	≤3KV
	1500/1	0.5	15		
	2000/1	0.2	15		
	2500/1	0.2	15		
	3000/1	0.2	20		
	4000/1	0.2	20		
	5000/1	0.2	20		

